
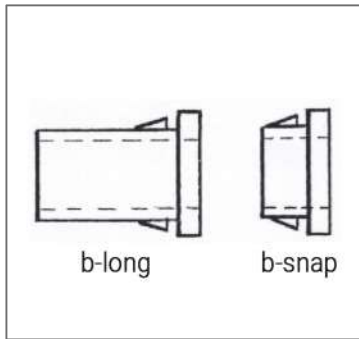


## PRODUCT DATA SHEET

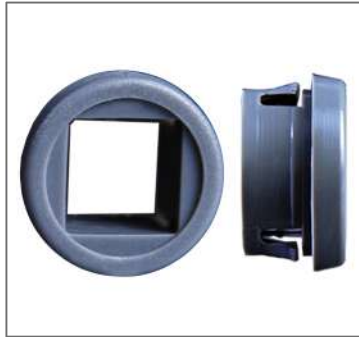

### Features | Ratings

- ✓ No more old style bushings with leaky air gaps
- ✓ Available for 3/8 in. or 1/2 in. square bar
- ✓ Snap into duct wall for instant air-tight seal
- ✓ Outperform all leakage standards and competitors
- ✓ Long bushing (B-long) protects duct lining
- ✓ Rated for medium pressure systems (Total System Static Pressure 2"-6" WG or Velocity Range 2000 fpm and up) and low pressure systems (0"-2" WG or 0-2000 fpm for 8 in. round duct)

### Construction | Materials

#### Made in the USA

Made of Flame Retardant Engineering Polymer (PA66 or equiv.), as specified in UL 1995 Standards Code for Heating & Cooling (CSA-C22.2 No. 238 UL 1995). Flammability rating 5VA.

### Safety | Quality Guarantee

All materials comply with **SMACNA standards** and are **UL-listed & Plenum-rated**. **Flame Retardant Engineering Polymer (PA66)** or equiv. as specified in **UL 1995 Standards Code for Heating & Cooling (CSA-C22.2 No. 238 UL 1995)**. **Flammability rating 5VA**. Deflection Temp. 450 F @66psi, 380 F @264psi. Tensile Strength @ Break, psi 9500. Tensile Modulus, psi 480,000.

### Dimensions | Part Number

- (B-snap) available for 3/8 in. or 1/2 in. square bar
- (B-long) is longer and protects 2 in. insulation
- Snap and lock into 3/4 in. hole in duct wall

### Flame Retardant Polyamide 66 (PA66) Flammability Rating 5VA

Material Dsg	Color	Min Thk mm	Flame Class	H		RTI			H	D	
				W	A	Elec	Mech	V	4	C	
				I	I		Imp	Str	R	5	I
FR50+(f1)	ALL	0.35	V-0	—	—	—	—	—	—	—	—
		0.75	V-0	0	0	130	105	105	—	—	—
	NC	1.5	5VA	0	0	130	115	115	—	—	—
	BK	3.0	5VA	0	0	130	115	120	1	6	2

